

2018



POLARIS[®]
OFF-ROAD VEHICLES



RANGER[®]

RZR

POLARIS
GENERAL[®]

SPORTSMAN[®]

POLARIS
ACE[®]

THE WORLD LEADER IN OFF-ROAD

For more than 30-years, Polaris® has been building the best off-road vehicles on earth. Vehicles that perform better, work harder, ride smoother, and deliver the ultimate riding experience.



UTILITY PG. 4

RANGER

CROSSOVER PG. 8

POLARIS
GENERAL

RECREATION PG. 10

RZR

ATV PG. 12

SPORTSMAN

ALL-NEW

POWER
IN NUMBERS

82
HORSEPOWER

13 IN
GROUND CLEARANCE

2,500 LB
TOWING CAPACITY

COCKPIT
ALL-NEW INTERIOR

» **NEW SEATS**

Thicker, contoured seats for all-day comfort

» **MORE STORAGE**

Flip-up passenger seat for more configurable storage

» **DUAL GLOVE BOXES**

Designed for twice the storage

» **MORE HOLDERS**

6 cup holders

» **NEW DASHBOARD**

New digital / analog gauge cluster for maximum visibility and information

MORE RUGGED
MORE REFINED **MORE**
RANGER

Through an unrelenting pursuit of innovation, unmatched performance, and unyielding dependability, Polaris *RANGER*® has been the number one utility side-by-side for 9-years running. Now there's an entirely new *RANGER*® — more rugged, more refined, and fueled by over one hundred owner-inspired improvements.

INTRODUCING THE ALL-NEW

RANGER
XP 1000

RANGER

RANGER

GET MORE DONE

RANGER XP® 900 EPS



The benchmark by which all others are measured, Polaris® RANGER® is the number one selling utility vehicle in the industry –and nothing else even comes close. Delivering on our hardest working, smoothest riding promise, RANGER® offers the most powerful lineup, the best handling and the largest breadth of integrated accessories. You can do more, tow more, haul more and ride more.

ALL-NEW
1 YEAR
STANDARD
LIMITED WARRANTY

ON ALL 2018 RANGER® MODELS

RANGER® 500



AWD
TRUE ON-DEMAND



RANGER CREW® XP 1000 EPS

BUILT TO HAUL MORE

UP TO **1,000 LB**
DUMPING CARGO BOX

UP TO **6 PERSON**
SEATING CAPACITY

CHOOSE YOUR RANGER®

SEE FULL LINE-UP AT POLARIS.COM

2-SEAT



MODEL SHOWN: RANGER® 500

COMPACT AND GREAT VALUE

- » 2-Seat Capacity
- » Up to 44 HP
- » 1,500 lb Towing Capacity
- » 10" Ground Clearance
- » 4 Models to Choose From

3-SEAT



MODEL SHOWN: RANGER XP® 1000 EPS

MAXIMUM PERFORMANCE AND CAPACITY

- » 3-Seat Capacity
- » Up to 82 HP
- » Up to 2,500 lb Towing Capacity
- » Up to 13" Ground Clearance
- » 4 Models to Choose From

CREW



MODEL SHOWN: RANGER CREW® XP 1000

COMFORTABLE SEATING FOR 4-6

- » Up to 80 HP
- » Up to 2,000 lb Towing Capacity
- » Up to 11.3" Ground Clearance
- » 5 Models to Choose From

ANY TASK ANY TRAIL



POLARIS GENERAL® 1000 EPS RIDE COMMAND® EDITION

Polaris GENERAL® is the perfect combination of premium-performance and never quit work-ethic, melded into the perfect balance side-by-side that is ready for Any Task. Any Trail. Anytime. Where the high-performance soul of RZR® and the hard-working heart of RANGER® meet, you'll find the uncompromising Polaris GENERAL®.



POLARIS GENERAL® 1000 EPS DELUXE

POWER IN NUMBERS

1,500 LB | **600 LB** | **100**
TOWING CAPACITY | DUMPING CARGO BOX | HORSEPOWER



POLARIS GENERAL® 4 1000 EPS

CLASS-LEADING CAPABILITIES

12.3 IN
FRONT SUSPENSION

13.2 IN
REAR SUSPENSION

12.0 IN
GROUND CLEARANCE

CHOOSE YOUR POLARIS GENERAL®
SEE FULL LINE-UP AT POLARIS.COM



MODEL SHOWN: POLARIS GENERAL® 1000 EPS

- STANDARD GENERAL® FEATURES:**
- » 1000 ProStar® 100 HP Engine
 - » Standard Half-Doors
 - » Electronic Power Steering (EPS)
 - » Engine Braking System (EBS)
 - » Lock & Ride® Compatible



MODEL SHOWN: POLARIS GENERAL® 1000 EPS PREMIUM

- BASE FEATURES PLUS:**
- » Automotive Paint
 - » Matte Black Cast Aluminum Wheels
 - » Low-Profile Front Bumper
 - » Polaris® HD 4,500 lb Winch



MODEL SHOWN: POLARIS GENERAL® 1000 EPS DELUXE

- PREMIUM FEATURES PLUS:**
- » FOX® 2.0 Podium X QS3 Shocks
 - » Polaris® Lock & Ride® Sport Roof
 - » MTX® Premium Soundbar
 - » Convex Rearview Mirror



MODEL SHOWN: POLARIS GENERAL® 4 1000 EPS

- SAME AS PREMIUM PLUS:**
- » Seating for 4
 - » Low-Profile Front Bumper
 - » Polaris® HD 4,500 lb Winch
 - » NEW FOX® 2.0 Podium X QS3 Shocks
 - » 27" GBC® Dirt Commander 8-Ply Tires

FUEL YOUR PASSION




INTRODUCING THE ALL-NEW
RZR XP[®] TURBO
DYNAMIX
 EDITION

DYNAMIX
 ACTIVE SUSPENSION

THE FUTURE OF RIDE AND HANDLING IS HERE

Introducing RZR DYNAMIX[™] Active Suspension. The world's first and only intelligent suspension system designed for the off-road. RZR DYNAMIX[™] electronically controls and adjusts shock damping to deliver the best ride in any terrain.

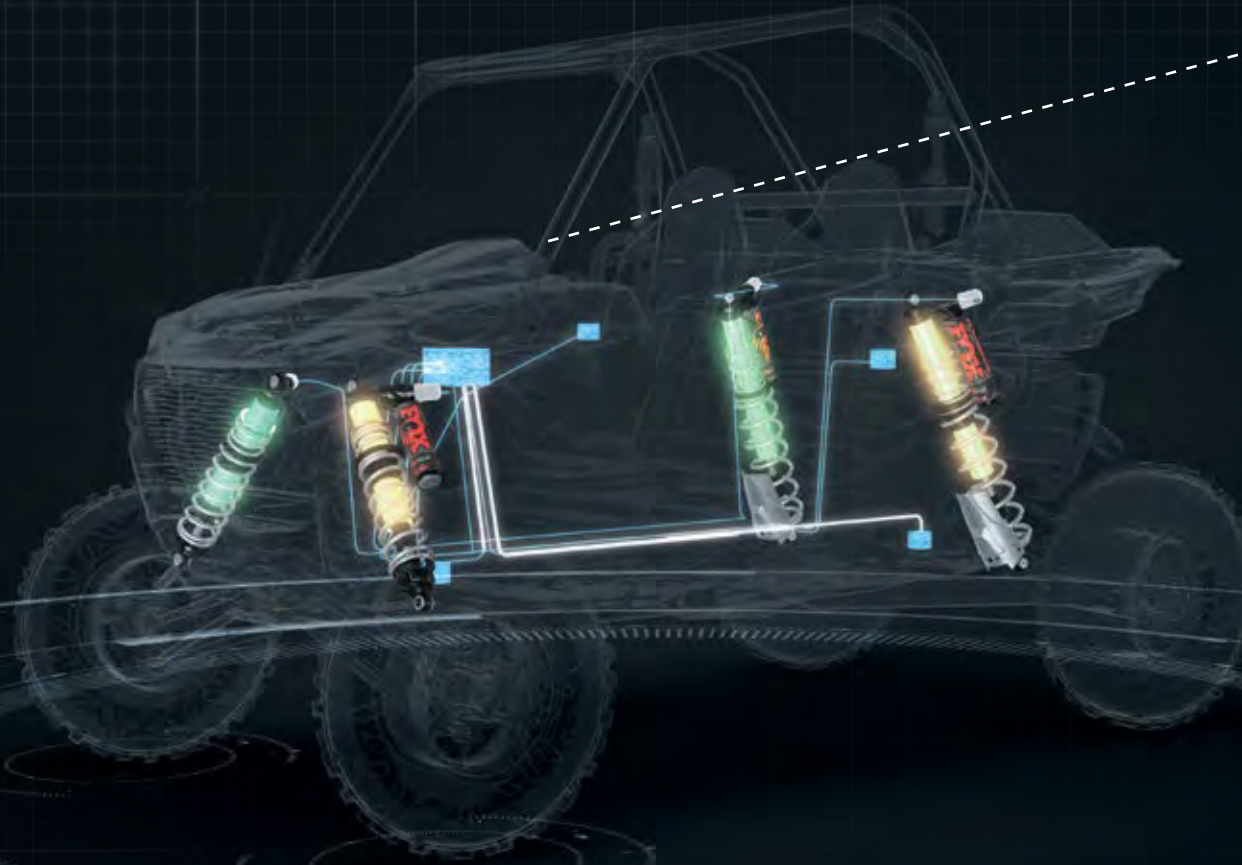

RZR DYNAMIX[™] calculates 7-vehicle inputs over 200-times-per-second to deliver the best ride at any moment:

- » Vehicle Speed
- » Brake Pedal Position
- » Throttle Pedal
- » Mode Switch
- » Steering Wheel Position
- » Accelerometer
- » Gyroscope

ADJUSTS 200 TIMES-PER-SECOND

SMART SUSPENSION MEANS NO COMPROMISE

ON-THE-FLY ADJUSTMENTS FOR ANY SITUATION



// CORNERING



Attack a corner and the outside shocks instantly firm up to reduce body roll, keeping you flat for the most grip possible. RZR DYNAMIX[™] is even smart enough to retune when you counter steer.

// SPEED



RZR DYNAMIX[™] stiffens all shocks as speed increases for ultimate performance. You can floor it from a dead stop or throttle out of a corner and the rear shocks firm up to maximize HP as you rocket forward.

// AIRBORNE



When all four wheels leave the ground, RZR DYNAMIX[™] is the perfect copilot ... As the wheels lift off, all four shocks go to maximum resistance. So you don't bottom out when you finally come back down to Earth.

OPEN HERE FOR THE ALL-NEW RZR® DYNAMIX™ EDITION



POWER UP-TO **168 HP**



UNRIVALED **SUSPENSION**



AGILITY FOR ANY **TERRAIN**

CHOOSE YOUR RZR®
SEE FULL LINE-UP AT POLARIS.COM

TRAIL-50 IN. WIDE **SPORT-60 IN. WIDE**



EXTREME PERFORMANCE-64 IN. WIDE

ALL-NEW PRICING



MULTI PASSENGER



SEE FULL SPECIFICATIONS ON PAGE 18 ▶

SPORTSMAN®

#1 BEST SELLING AUTOMATIC ATV

HARDEST WORKING. SMOOTHEST RIDING.



This is the ATV that changed everything. Groundbreaking in nearly every respect, the Sportsman® has become the benchmark by which all others are measured. With industry-leading power, payload, towing, suspension, premium features and accessories – Sportsman® is the number-one selling automatic ATV in the world.

SEE THE SPORTSMAN® IN ACTION AT POLARIS.COM



UNMATCHED WORK ETHIC
UP TO **90 HORSEPOWER** | UP TO **1,500 LB TOWING CAPACITY** | **360 LB CAPACITY RACK**



LEGENDARY RIDE & HANDLING
AWD TRUE ON-DEMAND | **11.5 IN GROUND CLEARANCE**

CHOOSE YOUR SPORTSMAN®
SEE FULL LINE-UP AT POLARIS.COM

REC/UTILITY

INDUSTRY'S BEST VALUE ATV

- » Up to 44 HP
- » Up to 1,500 lb Towing Capacity
- » True On-Demand AWD

SPORTSMAN® 570 EPS

SPORT/UTILITY

INDUSTRY LEADING PERFORMANCE

- » Up to 90 HP
- » High-Clearance Arched Dual A-Arms
- » High Performance On-Demand AWD

SPORTSMAN XP® 1000

2-UP

SAME BEST IN CLASS FEATURES PLUS SEATING FOR 2

- » Revolutionary Passenger Seat For Ultimate Comfort
- » 57" Wheel Base

SPORTSMAN XP® 1000

MUD & SPORT

PURPOSE BUILT FOR

- » Riding in Mud
- » Race-Inspired Scrambler™
- » Hunt Packages

SPORTSMAN XP® 1000 HIGH LIFTER® EDITION

YOUTH

IT'S THEIR TIME TO RIDE

- » For Riders Ages 6-14
- » ATV, RZR and ACE Models for All Riding Styles
- » EFI Engines for Reliable Starting in Cold Weather

OUTLAW® 110

SEE FULL SPECIFICATIONS ON PAGE 20 ▶

Based on IHS Automotive, Polk total new Automatic ATV registrations for CYE 2016 OR CY1Q 2017 (May)

SINGLE SEAT FREEDOM

Chart your own path with the unparalleled Polaris ACE. Nimble, powerful and comfortable, the Polaris ACE delivers a unique center-seat singular experience with the go anywhere capabilities of an ATV combined with the familiar controls of a side-by-side.



NEW! POLARIS ACE® 570 EPS

CHOOSE YOUR POLARIS ACE® SEE FULL LINE-UP AT POLARIS.COM



POLARIS ACE® 500

Horsepower	32 HP
Front Suspension	8.2" Travel
EPS	Not Equipped
Towing	1,500 lb
Wheelbase	61.5" (156.2 cm)
Ground Clearance	10" (26 cm)



POLARIS ACE® 570 EPS

Horsepower	45 HP
Front Suspension	9" Travel
EPS	Standard
Towing	1,500 lb
Wheelbase	61.5" (156.2 cm)
Ground Clearance	10.25" (26 cm)



POLARIS ACE® 900 XC

Horsepower	78 HP
Front Suspension	12.3" Travel
EPS	Standard
Towing	Not Recommended
Wheelbase	67.5" (171.5 cm)
Ground Clearance	13" (33 cm)

IF THEY LIKE TO RIDE, THEY'LL LOVE TO DRIVE

The industry's first single-seat youth model—the all-new Polaris Ace® 150 EFI is designed to give kids the joy of driving while providing safety features parents will love.



NEW! POLARIS ACE® 150 EFI

CHOOSE YOUR YOUTH MODEL SEE FULL LINE-UP AT POLARIS.COM

OUTLAW® 50 Ages 6+



OUTLAW® 110 EFI Ages 10+



SPORTSMAN® 110 EFI Ages 10+



PHOENIX 200 Ages 14+



POLARIS ACE® 150 EFI Ages 10+



RZR® 170 EFI Ages 10+



All youth models come standard with helmet, safety flag, parent adjustable speeds and other safety features.

2-SEAT

3-SEAT

CREW

SPECIAL EDITIONS

											
	RANGER® EV AVAIL. EV LI-ION	RANGER® 500	RANGER® 570 AVAIL. EPS	RANGER® 570 FULL-SIZE	RANGER XP® 900 AVAIL. EPS	RANGER XP® 1000 EPS AVAIL. BASE (SPECS. MAY VARY)	RANGER® DIESEL AVAIL. CREW	RANGER CREW® 570 AVAIL. EPS	RANGER CREW® 570 FULL-SIZE	RANGER CREW® XP 900 AVAIL. EPS	RANGER CREW® XP 1000 EPS
ENGINE / DRIVE TRAIN	Engine Type Single 48-Volt, High-Efficiency, AC-Induction Motor	ProStar® 500cc, 4-Stroke Single-Cylinder	ProStar® 567cc, 4-Stroke Single-Cylinder DOHC	ProStar® 567cc, 4-Stroke Single-Cylinder DOHC	ProStar® 875cc, 4-Stroke Twin-Cylinder DOHC	ProStar® 999cc, 4-Stroke Twin-Cylinder DOHC	1028cc, 3-Cylinder Diesel	ProStar® 567cc, 4-Stroke Single-Cylinder DOHC	ProStar® 567cc, 4-Stroke Single-Cylinder DOHC	ProStar® 875cc, 4-Stroke Twin-Cylinder DOHC	ProStar® 999cc, 4-Stroke Twin-Cylinder DOHC
	Horsepower 30 HP	32 HP	44 HP	44 HP	68 HP	82 HP	24 HP	44 HP	44 HP	68 HP	80 HP
	Drive System On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	High-Performance On-Demand True AWD / 2WD/VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	High Performance On-Demand True AWD / 2WD / VersaTrac Turf Mode
	Engine Braking System / Active Decent Control Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Standard	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped
SUSPENSION	Front Suspension MacPherson Strut 9" (22.9 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	Dual A-Arm 10" (25.4 cm) Travel	Dual A-Arm 11.0" (27.94 cm) Travel	Dual A-Arm 10.0" (25.4 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	Dual A-Arm 10.0" (25.4 cm) Travel	Dual A-Arm 10.0" (25.4 cm) Travel
	Rear Suspension Dual A-Arm, IRS 9" (22.9 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 11.0" (27.94 cm) Travel	Dual A-Arm, IRS 10.0" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10.0" (25.4 cm) Travel	Dual A-Arm, IRS 10.0" (25.4 cm) Travel
TIRES AND WHEELS	Front Tires 25 x 9-12; Carlisle®	25 x 8-12; 489	25 x 8-12; 489	25 x 8-12; 489	25 x 10-12; 489 <i>Painted MDL: 26 x 9-12; PXT</i>	27 x 9-12; Maxxis® MU51	25 x 10-12; 489 <i>26 x 9-12; PXT</i>	25 x 10-12; 489	25 x 10-12; 489	26 x 9-12; PXT	26 x 9-12; PXT
	Rear Tires 25 x 9-12; Carlisle®	25 x 10-12; 489	25 x 10-12; 489	25 x 10-12; 489	25 x 11-12; 489 <i>Painted MDL: 26 x 11-12; PXT</i>	27 x 11-12; Maxxis® MU51	25 x 11-12; 489 <i>26 x 11-12; PXT</i>	25 x 10-12; 489	25 x 10-12; 489	26 x 11-12; PXT	26 x 11-12; PXT
	Wheels Stamped Steel	Stamped Steel	Stamped Steel <i>Aluminum Black Xcelerator</i>	Stamped Steel	Stamped Steel <i>Painted MDL: Aluminum Black Xcelerator</i>	Aluminum Black Xcelerator 2.0	Stamped Steel	Stamped Steel <i>Aluminum Black Xcelerator</i>	Stamped Steel	Stamped Steel	Aluminum Black Xcelerator
DIMENSIONS / CAPACITIES	Wheelbase 72" (182.9 cm)	73" (185.4 cm)	73" (185.4 cm)	79" (202 cm)	81" (206 cm)	81" (206 cm)	81" (206 cm) <i>113 (287 cm)</i>	105" (266.7 cm)	107" (272.6 cm)	113" (287 cm)	113" (287 cm)
	Dry Weight 1,350 lb (612 kg) <i>1,328 lb (602 KG)</i>	1,065.92 lb (483 kg)	1,073 lb (488 kg) <i>1,101.92 lb (501 kg)</i>	1,070.85 lb (486 kg)	1,324.36 lb (601 kg) <i>1,342 lb (610 kg)</i>	1,565 lb (709.87 kg)	1,430.68 lb (649 kg) <i>1,688.47 lb (766 kg)</i>	1,326.24 lb (603 kg) <i>1,351.24 lb (614 kg)</i>	1,392.52 lb (632 kg)	1,612.03 lb (733 kg)	1,636.03 lb (742 kg)
	Overall Vehicle Size (L x W x H) 110 x 58 x 73" (279 x 147 x 185 cm)	110 x 58 x 73" (279 x 147 x 185 cm)	110 x 58 x 73" (279 x 147 x 185 cm)	114 x 60 x 74" (290 x 152 x 188 cm)	116.5 x 60 x 76" (296 x 152 x 193 cm)	120 x 62.5 x 77" (305 x 158 x 196 cm)	116.5 x 60 x 76" (296 x 152 x 193 cm) <i>148.5 x 61 x 76" (377 x 155 x 193 kg)</i>	142 x 60 x 73" (361 x 152 x 185 cm)	146 x 60 x 74" (370 x 152 x 188 cm)	148 x 61 x 76" (375 x 155 x 193 cm)	148 x 61 x 76" (375 x 155 x 193 cm)
	Ground Clearance 10" (25.4 cm)	10" (25.4 cm)	10" (25.4 cm)	10.5" (26.7 cm)	12" (30.5 cm)	13" (33 cm)	12" (30.5 cm) <i>11.3 (28.7 cm)</i>	10" (25.4 cm)	10.5" (26.7 cm)	11.3" (28.7 cm)	11.3" (28.7 cm)
	Seating Capacity 2	2	2	3	3	3	3 / 6	4	6	6	6
	Fuel Capacity N.A.	9 gal (34.1 L)	9 gal (34.1 L)	9 gal (34.1 L)	10 gal (37.9 L)	11.5 gal (43.5 L)	10 gal (37.9 L)	9 gal (34.1 L)	9 gal (34.1 L)	10 gal (37.9 L)	10 gal (37.9 L)
	Bed Box Dimensions (L x W x H) 32 x 42 x 11.5" (81 x 107 x 29 cm)	32 x 42 x 11.5" (81 x 107 x 29 cm)	32 x 42 x 11.5" (81 x 107 x 29 cm)	36.5 x 54 x 11.5" (93 x 137 x 29 cm)	36.5 x 54 x 11.5" (93 x 137 x 29 cm)	36.75 x 54.25 x 12.5" (93.3 x 137.8 x 31.75 cm)	36.5 x 54 x 11.5" (93 x 137 x 29 cm)	32 x 42 x 11.5" (81 x 107 x 29 cm)	36.5 x 54 x 11.5" (93 x 137 x 29 cm)	36.5 x 54 x 11.5" (93 x 137 x 29 cm)	36.5 x 54 x 11.5" (93 x 137 x 29 cm)
	Box Capacity 500 lb (226.8 kg)	500 lb (226.8 kg)	500 lb (226.8 kg)	800 lb (363 kg)	1,000 lb (453.6 kg)	1,000 lb (453.6 kg)	1,000 lb (453.6 kg)	500 lb (226.8 kg)	800 lb (363 kg)	1,000 lb (453.6 kg)	1,000 lb (453.6 kg)
	Payload Capacity 1,000 lb (453.6 kg)	1,000 lb (453.6 kg)	1,000 lb (453.6 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg) <i>1,750 lb (793.8 kg)</i>	1,250 lb (567 kg)	1,500 lb (680.4 kg)	1,750 lb (793.8 kg)	1,750 lb (793.8 kg)
	Hitch Towing Rating 1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	2,000 lb (907.2 kg)	2,500 lb (1,133.9 kg)	2,000 lb (907.2 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	2,000 lb (907.2 kg)	2,000 lb (907.2 kg)
FEATURES	Electronic Power Steering Not Equipped	Accessory Option	Accessory Option / Standard	Available	Accessory Option / Standard	Standard	Not Equipped	Accessory Option / Standard	Not Equipped	Accessory Option / Standard	Standard
	Adjustable Driver's Seat Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped <i>Painted MDL: Standard</i>	Standard	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Standard / *Polaris Pursuit® Camo not equipped
	Tilt Steering Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
	Color Avalanche Grey, Polaris Pursuit® Camo <i>Polaris Pursuit® Camo</i>	Sage Green, Solar Red	Sage Green, Polaris Pursuit® Camo <i>Navy Blue Metallic</i>	Solar Red, Sage Green	Sage Green, Polaris Pursuit® Camo <i>Solar Red, Sage Green, Radar Blue, Matte Titanium Metallic</i>	Sunset Red, Suede Metallic, Matte Titanium Metallic, Polaris Pursuit® Camo, <i>Sage Green</i>	Sage Green <i>Sage Green</i>	Sage Green, Polaris Pursuit® Camo <i>Navy Blue Metallic</i>	Sage Green	Sage Green <i>Polaris Pursuit® Camo</i>	Sunset Red, Suede Metallic, <i>Polaris Pursuit® Camo</i>



**NORTHSTAR EDITION
RANGER XP 1000 FEATURES PLUS:**

- » Premium Ranger Pro Shield™ Cab
- » Fixed-Glass Windshield with Wiper
- » Rear Glass Panel
- » Dome Light, Rearview Mirror
- » Heat, AC, Defrost
- » Cut-And-Sew Seats



**NORTHSTAR CREW EDITION
RANGER CREW XP 1000 FEATURES PLUS:**

- » Premium RANGER® Cab
- » Fixed-Glass Windshield with Wiper
- » Rear Glass Panel
- » Dome Light, Rearview Mirror
- » Heat, AC, Defrost
- » Cut-And-Sew Seats



**HIGH LIFTER EDITION
RANGER XP 1000 FEATURES PLUS:**

- » Mud-Specific Gearing
- » High-Mount Air Intake and Vent Lines
- » 12.8" Ground Clearance
- » 28" High Lifter Outlaw® 2 Tires
- » Polaris® HD 4,500 lb Winch



**HIGH LIFTER CREW EDITION
RANGER CREW XP 1000 FEATURES PLUS:**

- » Mud-Specific Gearing
- » High-Mount Air Intake and Vent Lines
- » 12.8" Ground Clearance
- » 28" High Lifter® Outlaw® 2 Tires
- » Polaris® HD 4,500 lb Winch

TRAIL

SPORT

XTREME

MULTI

SPECIAL EDITIONS

															
ENGINE / DRIVE TRAIN	Engine Type	ProStar® 570; 4-Stroke DOHC Single-Cylinder	ProStar® 570; 4-Stroke DOHC Single-Cylinder	ProStar® 900; 4-Stroke DOHC Twin-Cylinder	ProStar® 900; 4-Stroke DOHC Twin-Cylinder	ProStar® 900; 4-Stroke DOHC Twin-Cylinder	ProStar® 1000; 4-Stroke DOHC Twin-Cylinder	ProStar® 1000 H.O.; 4-Stroke DOHC Twin-Cylinder	ProStar® Turbo H.O.; 4-Stroke DOHC Twin-Cylinder Turbocharged	ProStar® Turbo H.O.; 4-Stroke DOHC Twin-Cylinder Turbocharged	ProStar® 900; 4-Stroke DOHC Twin-Cylinder	ProStar® 1000 H.O.; 4-Stroke DOHC Twin-Cylinder	ProStar® Turbo H.O.; 4-Stroke DOHC Twin Cylinder Turbocharged	ProStar Turbo H.O.; 4-Stroke DOHC Twin Cylinder Turbocharged	
Horsepower	45 HP	45 HP	75 HP	75 HP	75 HP	75 HP	100 HP	110 HP	168 HP	168 HP	75 HP	110 HP	168 HP	168 HP	
Drive System	True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2 WD / VersaTrac Turf Mode	True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High Performance True On-Demand AWD/2WD	High-Performance True On-Demand True AWD / 2WD	
Engine Braking System	Not Equipped	Standard	Standard	Standard	Standard	Standard	Standard	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	
SUSPENSION	Front Suspension	Dual A-Arm with Stabilizer Bar and 9" (22.9 cm) Travel	Dual A-Arm with Stabilizer Bar and 9" (22.9 cm) Travel	Dual A-Arm with Stabilizer Bar and 10" (25.4 cm) Travel	Dual A-Arm with Stabilizer Bar and 10" (25.4 cm) Travel	Dual A-Arm and 12.25" (31.1 cm) Travel	Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel	Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel	Dual A-Arm with Stabilizer Bar and 16" (40.6 cm) Travel	Dual A-Arm with Stabilizer Bar and 16" (40.6 cm) Travel	Dual A-Arm with Stabilizer Bar and 16" (40.6 cm) Travel	Dual A-Arm with Stabilizer Bar and 16" (40.6 cm) Travel	Dual A-Arm with Stabilizer Bar and 16" (40.6 cm) Travel	Dual A-Arm with Stabilizer Bar and 16" (40.6 cm) Travel	
Front Shocks	ZF Sachs®	ZF Sachs®	ZF Sachs®	ZF Sachs®	FOX® 2.0 PERFORMANCE PODIUM	2" Walker Evans® Needle	2" Walker Evans® Needle	2" Walker Evans® Needle with 16-Position Adjustable Clickers	2" Walker Evans® Needle with 16-Position Adjustable Clickers	FOX® 2.5 PODIUM LSC Internal Bypass	FOX® 2.0 PODIUM X	2" Walker Evans® Needle with 16-Position Adjustable Clickers	2" Walker Evans Needle with 16-Position Adjustable Clickers	FOX® 2.5 PODIUM LSC Internal Bypass	
Rear Suspension	Dual A-Arm with Stabilizer Bar and 9.5" (24 cm) Travel	Dual A-Arm with Stabilizer Bar and 9.5" (24 cm) Travel	Dual A-Arm with Stabilizer Bar and 10" (25.4 cm) Travel	Dual A-Arm with Stabilizer Bar and 10" (25.4 cm) Travel	Dual A-Arm and 13.2" (33.5 cm) Travel	Dual A-Arm with Stabilizer Bar and 13.2" (33.5 cm) Travel	Dual A-Arm with Stabilizer Bar and 13.2" (33.5 cm) Travel	Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel	Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel	Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel	Dual A-Arm with Stabilizer Bar and 13.2" (33.5 cm) Travel	Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel	Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel	Trailing Arm with Stabilizer Bar and 18" (45.7 cm) Travel	
Rear Shocks	ZF Sachs®	ZF Sachs®	ZF Sachs®	ZF Sachs®	FOX® 2.0 PERFORMANCE PODIUM	2" Walker Evans® Needle	2" Walker Evans® Needle	2.5" Walker Evans® Needle with 16-Position Adjustable Clickers	2.5" Walker Evans® Needle with 16-Position Adjustable Clickers	FOX® 3.0 PODIUM LSC Internal Bypass	FOX® 2.0 PODIUM X	2.5" Walker Evans® Needle with 16-Position Adjustable Clickers	2.5" Walker Evans Needle with 16-Position Adjustable Clickers	FOX® 3.0 PODIUM LSC Internal Bypass	
TIRES AND WHEELS	Front Tires	25 x 8-12; Ancla®	25 x 8-12; Maxxis®	26 x 8-12; PXT	26 x 8-12; PXT	27 x 9-12; GBC® Dirt Commander	27 x 9-12; GBC® Dirt Commander	27 x 9-12; GBC® Dirt Commander	29 x 9-14; Maxxis® Bighorn	29 x 9-14 Maxxis® Bighorn	29 x 9-14 Maxxis® Bighorn	27 x 9-12; GBC® Dirt Commander	29 x 9-14; Maxxis® Bighorn	29 x 9-14 Maxxis® Bighorn	29 x 9-14 Maxxis® Bighorn
Rear Tires	25 x 10-12; Ancla®	25 x 10-12; Maxxis®	26 x 9-12; PXT	26 x 9-12; PXT	27 x 11-12; GBC® Dirt Commander	27 x 11-12; GBC® Dirt Commander	27 x 11-12; GBC® Dirt Commander	29 x 11-14; Maxxis® Bighorn	29 x 11-14 Maxxis® Bighorn	29 x 11-14 Maxxis® Bighorn	27 x 11-12; GBC® Dirt Commander	29 x 11-14; Maxxis® Bighorn	29 x 11-14 Maxxis® Bighorn	29 x 11-14 Maxxis® Bighorn	
Wheels	Stamped Steel	Cast Aluminum	Stamped Steel	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	
DIMENSIONS / CAPACITIES	Wheelbase	77" (196 cm)	77" (196 cm)	79" (200.7 cm)	79" (200.7 cm)	79" (200.7 cm)	79" (200.7 cm)	79" (200.7 cm)	90" (228.6 cm)	90" (228.6 cm)	90" (228.6 cm)	106.5" (270.5 cm)	117" (297.2 cm)	117" (297.2 cm)	117" (297.2 cm)
Dry Weight	996 lb (452 kg)	1,077 lb (489 kg)	1,150 lb (522 kg)	1,176 lb (533 kg)	1,204 lb (546 kg)	1,230 lb (558 kg)	1,235 lb (560 kg)	1,369 lb (621 kg)	1,475 lb (669 kg)	1,479 lb (671 kg)	1,476 lb (670 kg)	1,565 lb (710 kg)	1,668 lb (757 kg)	1,672 lb (758 kg)	
Overall Vehicle Size (L x W x H)	107.5 x 50 x 69" (273 x 127 x 175.2 cm)	107.5 x 50 x 69" (273 x 127 x 175.2 cm)	105 x 50 x 69.5" (266.7 x 127 x 176.5 cm)	105 x 50 x 69.5" (266.7 x 127 x 176.5 cm)	106 x 60 x 71.5" (269.2 x 152.4 x 181.6 cm)	106 x 60 x 71.5" (269.2 x 152.4 x 181.6 cm)	106 x 60 x 71.5" (269.2 x 152.4 x 181.6 cm)	119 x 64 x 73.75" (302.2 x 162.6 x 187.3 cm)	119 x 64 x 73.75" (302.2 x 162.6 x 187.3 cm)	119 x 64 x 73.75" (302.2 x 162.6 x 187.3 cm)	138.1 x 60 x 71.7" (350.8 x 152.4 x 182.1 cm)	146 x 64 x 73.75" (370.8 x 162.6 x 187.3 cm)	146 x 64 x 73.75" (370.8 x 162.6 x 187.3 cm)	146 x 64 x 73.75" (370.8 x 162.6 x 187.3 cm)	
Ground Clearance	10.5" (26.7 cm)	10.5" (26.7 cm)	11" (27.9 cm)	11" (27.9 cm)	12.5" (31.8 cm)	12.5" (31.8 cm)	12.5" (31.8 cm)	13.5" (34.3 cm)	13.5" (34.3 cm)	13.5" (34.3 cm)	12.5" (31.8 cm)	13.5" (34.3 cm)	13.5" (34.3 cm)	13.5" (34.3 cm)	
Fuel Capacity	7.25 gal (27.4 L)	7.25 gal (27.4 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	
Bed Box Dimensions (L x W x H)	20 x 40 x 9" (51 x 102 x 23 cm)	20 x 40 x 9" (51 x 102 x 23 cm)	20.7 x 37 x 7.9" (52.5 x 94 x 20 cm)	20.7 x 37 x 7.9" (52.5 x 94 x 20 cm)	20.7 x 37 x 7.9" (52.5 x 94 x 20 cm)	20.7 x 37 x 7.9" (52.5 x 94 x 20 cm)	20.7 x 37 x 7.9" (52.5 x 94 x 20cm)	28 x 22 x 7" (72 x 57 x 17.8 cm)	28 x 22 x 7" (72 x 57 x 17.8 cm)	28 x 22 x 7" (72 x 57 x 17.8 cm)	20.7 x 37 x 7.9" (52.5 x 94 x 20cm)	28 x 22 x 7" (72 x 57 x 17.8 cm)	28 x 22 x 7" (72 x 57 x 17.8 cm)	28 x 22 x 7" (72 x 57 x 17.8 cm)	
Rear Rack Capacity	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	
Payload Capacity	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	900 lb (408.2 kg)	900 lb (408.2 kg)	900 lb (408.2 kg)	900 lb (408.2 kg)	
Lighting	Halogen, 50W	Halogen, 55W low / 60W high	Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights	Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights	Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights	Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights	Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights	White LED, Low/High & Red LED Tail / Brake Lights	White LED, Low / High & Red LED Tail / Brake Lights	White LED, Low / High & Red LED Tail / Brake Lights	Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights	White LED, Low / High & Red LED Tail / Brake Lights	White LED, Low / High & Red LED Tail / Brake Lights	White LED, Low/High & Red LED Tail / Brake Lights	

ALL-NEW



RZR DYNAMIX™ EDITION
SAME FEATURES AS RZR XP™ TURBO PLUS:

- » Dynamix™ Active Suspension
- » Dynamix™ Visualizer
- » Ride Command™ 7" Glove-Touch Display
- » Rear-Facing Camera
- » 900 Watt Stator



RIDE COMMAND™ EDITION
SAME FEATURES AS RZR XP™ 1000 PLUS:

- » 7" Glove-Touch Display
- » AM/FM Antenna
- » In-door Audio
- » Front and Rear Wired Cameras

[DOWNLOAD THE FREE RIDE COMMAND™ APP](#)



RIDE COMMAND™ 4-SEAT EDITION
SAME FEATURES AS RZR XP™ 4 1000 PLUS:

- » 7" Glove-Touch Display
- » AM/FM Antenna
- » In-door Audio
- » Front and Rear Wired Cameras

[DOWNLOAD THE FREE RIDE COMMAND™ APP](#)



HIGH LIFTER EDITION
SAME FEATURES AS RZR XP™ 1000 PLUS:

- » Front Bull Bumper with Winch Hook
- » Polaris® 4,500 lb Integrated Winch
- » High-Clearance Lower Control Arms
- » High-Clearance Lower Radius Rods
- » Outlaw 2 Tires
- » High-Mount Rear Intake System
- » Rearview Mirror and Half Doors



TRAILS & ROCKS EDITION
SAME FEATURES AS RZR XP™ 1000 PLUS:

- » Front Bull Bumper with Tow Loop
- » Polaris® 4,500 lb Integrated Winch
- » High-Clearance Lower Control Arms
- » High-Clearance Lower Radius Rods
- » ProArmor™ Crawler XG Tires with Beadlock Wheel
- » Rock Sliders & HMM Skid Plate
- » Rearview Mirror
- » High-Visibility Front Fender
- » Flares and Click-6 Harnesses

REC / UTILITY						SPORT / UTILITY				2-UP / UTILITY					MUD & SPORT				
																			
	<i>SPORTSMAN® 450 H.O. AVAILABLE EPS</i>	<i>SPORTSMAN® 450 H.O. UTILITY EDITION</i>	<i>SPORTSMAN® 570 AVAILABLE EPS</i>	<i>SPORTSMAN® 570 EPS UTILITY EDITION</i>	<i>SPORTSMAN® 570 SP</i>	<i>SPORTSMAN® 570 SP HUNTER EDITION</i>	<i>SPORTSMAN® 850</i>	<i>SPORTSMAN® 850 SP</i>	<i>SPORTSMAN XP® 1000</i>	<i>SPORTSMAN XP® 1000 HUNTER EDITION</i>	<i>SPORTSMAN® X2 570 EPS</i>	<i>SPORTSMAN® TOURING 570 AVAILABLE EPS</i>	<i>SPORTSMAN® TOURING 570 SP</i>	<i>SPORTSMAN® TOURING 850 SP</i>	<i>SPORTSMAN TOURING XP® 1000</i>	<i>SPORTSMAN XP® 1000 HIGH LIFTER EDITION</i>	<i>SPORTSMAN® 850 HIGH LIFTER EDITION</i>		
ENGINE / DRIVE TRAIN	Engine Type	ProStar® 500cc, 4-Stroke SOHC Single-Cylinder	ProStar® 500cc, 4-Stroke SOHC Single-Cylinder	ProStar® 567cc, 4-Stroke DOHC Single-Cylinder	ProStar® 567cc, 4-Stroke DOHC Single-Cylinder	ProStar® 567cc, 4-Stroke DOHC Single-Cylinder	ProStar® 850cc, 4-Stroke SOHC Twin-Cylinder	ProStar® 850cc, 4-Stroke SOHC Twin-Cylinder	ProStar® 952cc, 4-Stroke SOHC Twin-Cylinder	ProStar® 952cc, 4-Stroke SOHC Twin-Cylinder	ProStar® 567cc, 4-Stroke DOHC Single-Cylinder	ProStar® 567cc, 4-Stroke DOHC Single-Cylinder	ProStar® 567cc, 4-Stroke DOHC Single-Cylinder	ProStar® 850cc, 4-Stroke SOHC Twin-Cylinder	ProStar® 952cc, 4-Stroke SOHC Twin-Cylinder	ProStar® 952cc, 4-Stroke SOHC Twin-Cylinder	ProStar® 850cc, 4-Stroke SOHC Twin-Cylinder		
	Horsepower	33 HP	33 HP	44 HP	44 HP	44 HP	78 HP	78 HP	90 HP	90 HP	44 HP	44 HP	44 HP	78 HP	88 HP	85 HP	78 HP		
	Drive System	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	High Performance True On-Demand AWD / 2WD	High Performance True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	High Performance True On-Demand AWD / 2WD	High Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	
	Engine Braking System / Active Descent Control	Not Equipped / Not Equipped	Not Equipped / Not Equipped	Not Equipped / Not Equipped	Standard / Not Equipped	Standard / Standard	Standard / Standard	Standard / Not Equipped	Standard / Standard	Standard / Standard	Standard / Standard	Standard / Standard	Not Equipped / Not Equipped	Standard / Standard	Standard / Standard	Standard / Standard	Not Equipped / Not Equipped	Not Equipped / Not Equipped	
SUSPENSION	Front Suspension	MacPherson Strut, 8.2" (20.8 cm) Travel	MacPherson Strut, 8.2" (20.8 cm) Travel	MacPherson Strut, 8.2" (20.8 cm) Travel	MacPherson Strut, 8.2" (20.8 cm) Travel	Dual A-Arm, 8.2" (20.8 cm) Travel	Dual A-Arm, 8.2" (20.8 cm) Travel	High-Clearance Arched Dual A-Arm, 9" (22.9 cm) Travel	High-Clearance Arched Dual A-Arm, 9" (22.9 cm) Travel	High-Clearance Arched Dual A-Arm, 9" (22.9 cm) Travel	High-Clearance Arched Dual A-Arm, 9" (22.9 cm) Travel	MacPherson Strut, 8.2" (20.8 cm) Travel	MacPherson Strut, 8.2" (20.8 cm) Travel	Dual A-Arm, 8.2" (20.8 cm) Travel	Dual A-Arm, 9" (22.9 cm) Travel	Dual A-Arm, 9" (22.9 cm) Travel	High-Clearance Arched Dual A-Arm, 7.4" (18.8 cm) Travel	High-Clearance Arched Dual A-Arm, 7.4" (18.8 cm) Travel	
	Rear Suspension	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	High-Clearance Arched Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel	High-Clearance Arched Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel	High-Clearance Arched Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel	High-Clearance Arched Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, Rolled IRS, 10.2" (26 cm) Travel	Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel	High-Clearance Arched Dual A-Arm, Rolled IRS, 6.7" (17 cm) Travel	High-Clearance Arched Dual A-Arm, Rolled IRS, 6.7" (17 cm) Travel	
TIRES & WHEELS	Front Tires	24X8-12; NS388	24X8-12; NS388	25 x 8-12; 489	25 x 8-12; 489	26 x 8-14; CST / PXT 6-Ply Radial	26 x 8-14; CST / PXT 6-Ply Radial	26 x 8-14; CST	26 x 8-14; CST	26 x 8-14; CST	26 x 8-14; CST	25 x 8-12; 489	25 x 8-12; 489	26 x 8-14; CST	26 x 8-14; CST	26 x 9-14; PXT	29.5 x 9.5-14; Outlaw	29.5 x 9.5-14; Outlaw	
	Rear Tires	24X10-12; NS388	24X10-12; NS388	25 x 10-12; 489	25 x 10-12; 489	26 x 8-14; CST / PXT 6-Ply Radial	26 x 10-14; CST / PXT 6-Ply Radial	26 x 10-14; CST	26 x 10-14; CST	26 x 10-14; CST	26 x 10-14; CST	25 x 10-12; 489	25 x 10-12; 489	26 x 10-14; CST	26 x 10-14; CST	26 x 11-14; PXT	29.5 x 9.5-14; Outlaw	29.5 x 9.5-14; Outlaw	
	Wheels	Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel	Cast Aluminum	Cast Aluminum	Stamped Steel	Cast Aluminum	Cast Aluminum	Cast Aluminum	Stamped Steel	Stamped Steel	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Stamped Steel
DIMENSIONS / CAPACITIES	Wheelbase	50.5" (128.3 cm)	50.5" (128.3 cm)	50.5" (128.3 cm)	50.5" (128.3 cm)	50.5" (128.3 cm)	50.5" (128.3 cm)	53" (134.6 cm)	53" (134.6 cm)	53" (134.6 cm)	53" (134.6 cm)	56" (142.2 cm)	56" (142.2 cm)	56" (142.2 cm)	57" (144.8 cm)	57" (144.8 cm)	53" (134.6 cm)	53" (134.6 cm)	
	Dry Weight	701 lb (318 kg)	721 lb (328 kg)	704 lb (330 kg)	755 lb (343 kg)	730 lb (332 kg)	753 lb (342 kg)	771 lb (351 kg)	785 lb (359 kg)	805 lb (366 kg)	805 lb (366 kg)	788 lb (358 kg)	728 lb (330 kg)	773 lb (351 kg)	804 lb (365 kg)	886 lb (403 kg)	974 lb (441 kg)	921 lb (417 kg)	
	Overall Vehicle Size (L x W x H)	83 x 48 x 47" (210.8 x 121.9 x 119.4 cm)	84 x 48 x 47" (213 x 121.9 x 119.4 cm)	83 x 48 x 48" (210.8 x 121.9 x 121.9 cm)	83 x 48 x 48" (210.8 x 121.9 x 121.9 cm)	83 x 48 x 48" (210.8 x 121.9 x 121.9 cm)	83 x 48 x 48" (210.8 x 121.9 x 121.9 cm)	83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm)	83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm)	83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm)	83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm)	89 x 48 x 48" (218.4 x 121.9 x 121.9 cm)	86 x 48 x 48" (218.4 x 121.9 x 121.9 cm)	86 x 48 x 48" (218.4 x 121.9 x 121.9 cm)	86.5 x 47.6 x 58.25" (219.7 x 120.9 x 147.9 cm)	86.5 x 47.6 x 58.25" (219.7 x 120.9 x 147.9 cm)	88 x 49 x 52" (223 x 124 x 132 cm)	83 x 49 x 52" (210 x 124 x 132 cm)	
	Ground Clearance	10.5" (26.6 cm)	10.5" (26.6 cm)	11" (27.9 cm)	11" (27.9 cm)	11.5" (29.2 cm)	11.5" (29.2 cm)	11.5" (29.2 cm)	11.5" (29.2 cm)	11.5" (29.2 cm)	11.5" (29.2 cm)	11" (27.9 cm)	11" (27.9 cm)	11.5" (29.2 cm)	11.25" (28.5 cm)	11.25" (28.5 cm)	13.5" (34.3 cm)	13.5" (34.3 cm)	
	Seat Height	33.25" (84.5 cm)	33.25" (84.5 cm)	33.75" (85.7 cm)	33.75" (85.7 cm)	34.25" (87 cm)	34.25" (87 cm)	37" (94 cm)	37" (94 cm)	37" (94 cm)	37" (94 cm)	33.75" (85.7 cm)	33.75" (85.7 cm)	34.25" (87 cm)	35.75" (90.8 cm)	35.75" (90.8 cm)	39" (99 cm)	39" (99 cm)	
	Fuel Capacity	4.5 gal (17.0 L)	4.5 gal (17.0 L)	4.5 gal (17.0 L)	4.5 gal (17.0 L)	4.5 gal (17.0 L)	4.5 gal (17.0 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)	6.75 gal (26.3 L)	6.75 gal (26.3 L)	6.75 gal (26.3 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)	
	Rear Box Dimensions (L x W x H)	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	37.5 x 19.5 x 6.5" (95 x 49.5 x 16.5 cm)	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
	Front/Rear Rack Capacity	90 lb (40.8 kg) / 180 lb (81.6 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	120 lb (55 kg) / 240 lb (110 kg)	120 lb (55 kg) / 240 lb (110 kg)	120 lb (55 kg) / 240 lb (110 kg)	120 lb (55 kg) / 240 lb (110 kg)	90 lb (40.8 kg) / 400 lb (180 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	120 lb (55 kg) / 240 lb (110 kg)	120 lb (55 kg) / 240 lb (110 kg)	N.A. / 75 lb (34 kg)	N.A. / 75 lb (34 kg)	
Payload Capacity	485 lb (220 kg)	485 lb (220 kg)	485 lb (220 kg)	485 lb (220 kg)	485 lb (220 kg)	485 lb (220 kg)	575 lb (261 kg)	575 lb (261 kg)	575 lb (261 kg)	575 lb (261 kg)	705 lb (320 kg)	575 lb (261 kg)	485 lb (220 kg)	575 lb (261 kg)	575 lb (261 kg)	290 lb (132 kg)	290 lb (132 kg)		
Hitch Towing Rating	1,225 lb (555.7 kg)	1,225 lb (555.7 kg)	1,225 lb (555.7 kg)	1,225 lb (555.7 kg)	1,500 lb (680 kg)	1,500 lb (680 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,225 lb (555.7 kg)	1,225 lb (555.7 kg)	1,500 lb (680 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)		
Colors	Sage Green, Velocity Blue Velocity Blue	Ghost Grey	Sage Green, Indy Red Polaris Pursuit® Camo	Ghost Grey	Sunset Red, Radar Blue	Polaris Pursuit® Camo	Sage Green, Indy Red	Matte Sunset Red, Titanium Matte Metallic, Polaris Pursuit® Camo		Havasu Red Pearl	Polaris Pursuit® Camo	Sage Green	Indy Red, Velocity Blue	Turbo Silver	Radar Blue	Turbo Silver	Stealth Black	Cruiser Black	

POLARIS GENERAL® 2018 SPECIFICATIONS

	2-SEAT			4-SEAT			SPECIAL EDITIONS				
											
	<i>POLARIS GENERAL® 1000 EPS</i>	<i>POLARIS GENERAL® 1000 EPS PREMIUM</i>	<i>POLARIS GENERAL® 1000 EPS DELUXE</i>	<i>POLARIS GENERAL® 4 1000 EPS</i>	<i>POLARIS GENERAL® 1000 EPS RIDE COMMAND®</i>	<i>POLARIS GENERAL® 1000 EPS HUNTER EDITION</i>	<i>POLARIS GENERAL® 1000 EPS LIMITED EDITION</i>				
ENGINE/DRIVE TRAIN	ProStar® 1000; 4-Stroke DOHC Twin-Cylinder	ProStar® 1000; 4-Stroke DOHC Twin-Cylinder	ProStar® 1000; 4-Stroke DOHC Twin-Cylinder	ProStar 1000; 4-Stroke DOHC Twin-Cylinder	ProStar® 1000; 4-Stroke DOHC Twin-Cylinder	ProStar® 1000; 4-Stroke DOHC Twin-Cylinder	ProStar® 1000; 4-Stroke DOHC Twin-Cylinder				
Horsepower	100 HP	100 HP	100 HP	100 HP	100 HP	100 HP	100 HP				
Drive System	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode				
Engine Braking System	Standard	Standard	Standard	Standard	Standard	Standard	Standard				
SUSPENSION	Front Suspension: Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel Rear Suspension: Dual Arm IRS with Stabilizer Bar and 13.2" (33.5 cm) Travel	Front Suspension: Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel Rear Suspension: Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Front Suspension: Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel Rear Suspension: Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Front Suspension: Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel Rear Suspension: Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Front Suspension: Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel Rear Suspension: Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Front Suspension: Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel Rear Suspension: Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Front Suspension: Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel Rear Suspension: Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Front Suspension: Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel Rear Suspension: Dual A-Arm, IRS 9.5" (24.1 cm) Travel			
TIRES & WHEELS	Front Tires: 27x9.00R12 NHS; CST Clincher Rear Tires: 27x11.00R12 NHS; CST Clincher Wheels: Stamped Steel	Front Tires: 27 x 9-14; Maxxis® Coronado Rear Tires: 27 x 11-14; Maxxis® Coronado Wheels: Cast Aluminum	Front Tires: 27 x 9-14; Maxxis® Coronado Rear Tires: 27 x 11-14; Maxxis® Coronado Wheels: Cast Aluminum	Front Tires: 27 x 9-14; Dirt Commander Rear Tires: 27 x 11-14; Maxxis® Coronado Wheels: Cast Aluminum	Front Tires: 27 x 9-14; Maxxis® Coronado Rear Tires: 27 x 11-14; Maxxis® Coronado Wheels: Cast Aluminum	Front Tires: 27 x 9-14; Maxxis® Coronado Rear Tires: 27 x 11-14; Maxxis® Coronado Wheels: Cast Aluminum	Front Tires: 27 x 9-14; Maxxis® Coronado Rear Tires: 27 x 11-14; Maxxis® Coronado Wheels: Cast Aluminum	Front Tires: 27 x 9-14; Maxxis® Coronado Rear Tires: 27 x 11-14; Maxxis® Coronado Wheels: Cast Aluminum			
DIMENSIONS / CAPACITIES	Wheelbase: 81" (206 cm) Dry Weight: 1,430 lb (648 kg) Overall Vehicle Size (L x W x H): 116.4 x 62.5 x 73.8" (295.6 x 158.7 x 187 cm) Ground Clearance: 12" (30.5 cm) Fuel Capacity: 9.5 gal (35.9 L) Bed Box Dimensions (L x W x H): 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) Rear Rack Capacity: 600 lb (272 kg) Payload Capacity: 1,100 lb (499 kg) Electronic Power Steering: Standard	Wheelbase: 81" (206 cm) Dry Weight: 1,491 lb (676 kg) Overall Vehicle Size (L x W x H): 116.4 x 62.5 x 73.8" (295.6 x 158.7 x 187 cm) Ground Clearance: 12" (30.5 cm) Fuel Capacity: 9.5 gal (35.9 L) Bed Box Dimensions (L x W x H): 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) Rear Rack Capacity: 600 lb (272 kg) Payload Capacity: 1,100 lb (499 kg) Electronic Power Steering: Standard	Wheelbase: 81" (206 cm) Dry Weight: 1,544 lb (700 kg) Overall Vehicle Size (L x W x H): 118.2 x 62.5 x 75" (300 x 158.7 x 190.5 cm) Ground Clearance: 12" (30.5 cm) Fuel Capacity: 9.5 gal (35.9 L) Bed Box Dimensions (L x W x H): 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) Rear Rack Capacity: 600 lb (272 kg) Payload Capacity: 1,100 lb (499 kg) Electronic Power Steering: Standard	Wheelbase: 113" (287 cm) Dry Weight: 1,857 lb (842 kg) Overall Vehicle Size (L x W x H): 150.2 x 62.5 x 75" (381.5 x 158.7 x 190.5 cm) Ground Clearance: 12" (30.5 cm) Fuel Capacity: 9.5 gal (35.9 L) Bed Box Dimensions (L x W x H): 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) Rear Rack Capacity: 600 lb (272 kg) Payload Capacity: 1,280 lb (580 kg) Electronic Power Steering: Standard	Wheelbase: 81" (206 cm) Dry Weight: 1,544 lb (700 kg) Overall Vehicle Size (L x W x H): 118.2 x 62.5 x 75" (300 x 158.7 x 190.5 cm) Ground Clearance: 12" (30.5 cm) Fuel Capacity: 9.5 gal (35.9 L) Bed Box Dimensions (L x W x H): 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) Rear Rack Capacity: 600 lb (272 kg) Payload Capacity: 1,100 lb (499 kg) Electronic Power Steering: Standard	Wheelbase: 81" (206 cm) Dry Weight: 1,491 lb (676 kg) Overall Vehicle Size (L x W x H): 118.2 x 62.5 x 73.8" (300 x 158.7 x 187 cm) Ground Clearance: 12" (30.5 cm) Fuel Capacity: 9.5 gal (35.9 L) Bed Box Dimensions (L x W x H): 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) Rear Rack Capacity: 600 lb (272 kg) Payload Capacity: 1,100 lb (499 kg) Electronic Power Steering: Standard	Wheelbase: 81" (206 cm) Dry Weight: 1,491 lb (676 kg) Overall Vehicle Size (L x W x H): 118.2 x 62.5 x 73.8" (300 x 158.7 x 187 cm) Ground Clearance: 12" (30.5 cm) Fuel Capacity: 9.5 gal (35.9 L) Bed Box Dimensions (L x W x H): 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) Rear Rack Capacity: 600 lb (272 kg) Payload Capacity: 1,100 lb (499 kg) Electronic Power Steering: Standard	Wheelbase: 81" (206 cm) Dry Weight: 1,491 lb (676 kg) Overall Vehicle Size (L x W x H): 118.2 x 62.5 x 73.8" (300 x 158.7 x 187 cm) Ground Clearance: 12" (30.5 cm) Fuel Capacity: 9.5 gal (35.9 L) Bed Box Dimensions (L x W x H): 27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm) Rear Rack Capacity: 600 lb (272 kg) Payload Capacity: 1,100 lb (499 kg) Electronic Power Steering: Standard			
Other Features		Polaris® HD 4,500 lb Winch Sport Low Profile Front Bumper	Polaris® HD 4,500 lb Winch, Sport Low Profile Front Bumper, Polaris® Lock & Ride® Sport Roof, Premium 8-Speaker Bluetooth® AM/FM Soundbar, Convex Rear View Mirror	Polaris® HD 4,500 lb Winch Sport Low Profile Front Bumper	Polaris® HD 4,500 lb Winch, Sport Low Profile Front Bumper, Polaris® Lock & Ride® Sport Roof, Premium 8-Speaker Bluetooth® AM/FM Soundbar, Convex Rear View Mirror, Front & Rear On-board Cameras	Polaris® HD 4,500 lb Winch, Sport Low Profile Front Bumper, Lock & Ride® Dual Gun Scabbard, Polaris® Gun Boots (Qty 2)	Polaris® HD 4,500 lb Winch Sport Low Profile Front Bumper Lock & Ride® Tip Down Headache Rack				
Colors	Indy Red	Radar Blue	Gloss Titanium	Black Pearl	Matte Sunset Red	Polaris Pursuit® Camo	Matte Sagebrush Green				

YOUTH 2018 SPECIFICATIONS

							
	<i>OUTLAW® 50</i>	<i>OUTLAW® 110 EFI</i>	<i>SPORTSMAN® 110 EFI</i>	<i>POLARIS ACE® 150 EFI</i>	<i>RZR® 170 EFI</i>	<i>PHOENIX 200</i>	
ENGINE	Age: 6+ Engine Type: 49cc, 4-Stroke Single-Cylinder Fuel System: Carbureted Cooling: Air	Age: 10+ Engine Type: 112cc, 4-Stroke Single-Cylinder Fuel System: EFI Cooling: Air	Age: 10+ Engine Type: 112cc, 4-Stroke Single-Cylinder Fuel System: EFI Cooling: Air	Age: 10+ Engine Type: 149cc, 4-Stroke Single-Cylinder Fuel System: EFI Cooling: Air/Oil	Age: 10+ Engine Type: 169cc, 4-Stroke Single-Cylinder Fuel System: EFI Cooling: Fan	Age: 14+ Engine Type: 196cc, 4-Stroke Single-Cylinder Fuel System: Carbureted Cooling: Air	
DRIVE TRAIN / SUSPENSION	Transmission/Final Drive: Automatic PVT Forward; O-ring Chain Drive System: 2WD Front Suspension: Single A-Arm with 3" (7.6 cm) Travel Rear Suspension: Mono-Shock Swingarm with 3" (7.6 cm) Travel	Transmission/Final Drive: Automatic PVT F/N/R; O-ring Chain Drive System: 2WD Front Suspension: Single A-Arm with 5" (12.7 cm) Travel Rear Suspension: Mono-Shock Swingarm with 6" (15.2 cm) Travel	Transmission/Final Drive: Automatic PVT F/N/R; O-ring Chain Drive System: 2WD Front Suspension: Single A-Arm with 5" (12.7 cm) Travel Rear Suspension: Mono-Shock Swingarm with 6" (15.2 cm) Travel	Transmission/Final Drive: Automatic PVT F/N/R; O-ring Chain Drive System: 2WD Front Suspension: Dual A-Arm 5.1" (13 cm) Travel Rear Suspension: Swingarm Dual Shocks with 6" (15.2 cm) Travel	Transmission/Final Drive: Automatic PVT F/N/R; O-ring Chain Drive System: 2WD Front Suspension: Single A-Arm with 5" (12.7 cm) Travel Rear Suspension: Swingarm Dual Shocks with 5" (12.7 cm) Travel	Transmission/Final Drive: Automatic PVT F/N/R; Shaft Drive System: 2WD Front Suspension: Dual A-Arm with 7" (17.8 cm) Travel Rear Suspension: Mono-Shock Swingarm with 6.5" (16.5 cm) Travel	
TIRES & WHEELS	Front Tires: 16 x 6.5-7 Rear Tires: 16 x 8-7 Wheels: Stamped Steel	Front Tires: 19 x 7-8 Rear Tires: 18 x 9.5-8 Wheels: Stamped Steel	Front Tires: 19 x 7-8 Rear Tires: 18 x 9.5-8 Wheels: Stamped Steel	Front Tires: 22 x 7-10 Rear Tires: 20 x 10-9 Wheels: Stamped Steel	Front Tires: 19 x 7-8 Rear Tires: 20 x 10-9 Wheels: Stamped Steel	Front Tires: 21 x 7-10 Rear Tires: 20 x 10-9 Wheels: Stamped Steel	
DIMENSIONS / CAPACITIES	Wheelbase: 33" (83.8 cm) Dry Weight: 215 lb (98 kg) Overall Vehicle Size (L x W x H): 48 x 31.5 x 28" (121.9 x 80 x 71.1 cm) Ground Clearance: 4" (10.2 cm) Seat Height: 23" (58.4 cm) Fuel Capacity: 1.2 gal (4.5 L) Rear Box Dimensions (L x W x H): N.A. Front/Rear Rack or Box Capacity: N.A. Payload Capacity: N.A.	Wheelbase: 41.5" (105.4 cm) Dry Weight: 278 lb (126 kg) Overall Vehicle Size (L x W x H): 61.25 x 36.75 x 38.5" (155.6 x 93.3 x 97.8 cm) Ground Clearance: 4" (10.2 cm) Seat Height: 27" (68.6 cm) Fuel Capacity: 1.6 gal (5.9 L) Rear Box Dimensions (L x W x H): N.A. Front/Rear Rack or Box Capacity: N.A. Payload Capacity: N.A.	Wheelbase: 41.5" (105.4 cm) Dry Weight: 289 lb (131 kg) Overall Vehicle Size (L x W x H): 61.75 x 36.75 x 38.5" (156.8 x 93.3 x 97.8 cm) Ground Clearance: 4" (10.2 cm) Seat Height: 27" (68.6 cm) Fuel Capacity: 2.0 gal (7.8 L) Rear Box Dimensions (L x W x H): N.A. Front/Rear Rack or Box Capacity: 15 lb / 30 lb (6.8 kg / 13.6 kg) Payload Capacity: 45 lb (20.4 kg)	Wheelbase: 65" (165.1 cm) Dry Weight: 572 lb (260 kg) Overall Vehicle Size (L x W x H): 85 x 48 x 58" (215.9 x 121.9 x 147.3 cm) Ground Clearance: 9" (22.9 cm) Seat Height: N.A. Fuel Capacity: 2.5 gal (9.5 L) Rear Box Dimensions (L x W x H): 17 x 32 x 3" (43.2 x 81.3 x 7.6 cm) Front/Rear Rack or Box Capacity: 50 lb (22.7 kg) Payload Capacity: 50 lb (22.7 kg)	Wheelbase: 65" (165.1 cm) Dry Weight: 532 lb (241 kg) Overall Vehicle Size (L x W x H): 85 x 48 x 55" (215.9 x 121.9 x 139.7 cm) Ground Clearance: 6" (15.2 cm) Seat Height: N.A. Fuel Capacity: 2.5 gal (9.5 L) Rear Box Dimensions (L x W x H): N.A. Front/Rear Rack or Box Capacity: N.A. Payload Capacity: N.A.	Wheelbase: 45" (114.3 cm) Dry Weight: 420 lb (191 kg) Overall Vehicle Size (L x W x H): 65 x 42 x 42" (165.1 x 106.7 x 106.7 cm) Ground Clearance: 5.7" (14.5 cm) Seat Height: 32" (81.3 cm) Fuel Capacity: 2.5 gal (9.5 L) Rear Box Dimensions (L x W x H): N.A. Front/Rear Rack or Box Capacity: N.A. Payload Capacity: N.A.	
Colors	Pink Power, Lime Squeeze	Pink Power, Lime Squeeze	Velocity Blue	Indy Red	Cruiser Black / Lime Squeeze or Bright White / Indy Red	Avalanche Grey	

2018



POLARIS
OFF-ROAD VEHICLES

— LEARN MORE AT —
POLARIS.COM

RANGER

RZR

POLARIS
GENERAL

SPORTSMAN

POLARIS
ACE



WARNING: The Polaris off-road vehicles can be hazardous to operate and is not intended for on-road use. Driver must be at least 16 years old with a valid driver's license to operate. Passengers must be at least 12 years old. Drivers and passengers should always wear helmets, eye protection, and seat belts. Always use cab nets or doors (as equipped). Never engage in stunt driving, and avoid excessive speeds and sharp turns. Riding and alcohol/drugs don't mix. All drivers should take a safety training course. Call 800-342-3764 for additional information. Check local laws before riding on trails. All claims based on IHS Automotive, Polk total full-size new U.S. Automatic ATV registrations between October 2015 and December 2016. HIGH LIFTER and HIGH LIFTER OUTLAW are trademarks of HIGH LIFTER PRODUCTS, INC. Bluetooth® is a registered trademark of Bluetooth Sig. Inc. All rights reserved. ©2017 Polaris Industries Inc. all pricing, specifications, claims and information contained in this brochure are based on information available at the time of publication and are subject to change without notice.

Youth models have special age restrictions: the Polaris RZR® 170 and ACE® 150 are intended for operators age 10 and older, 50-cc ATV models are intended for operators ages 6 and over, 110-cc ATV models are intended for operators ages 10 and older, and the 200-cc ATV is intended for operators age 14 and older. All Polaris youth vehicles require adult supervision at all times for operators under age 16.

Part No. 9330396